




Acoustifoam™ DOUBLE 'S' Ceiling Baffles *Data Sheet*

The DOUBLE 'S' Baffles are like the Sinuous Baffles in visual flow and appeal, though with an amplified amount (2x) of visual humps and valleys within an equivalent sized SINUOUS Baffle. The Double 'S' Panels can easily be hung horizontally, vertically, or even affixed on to a wall or substrate.

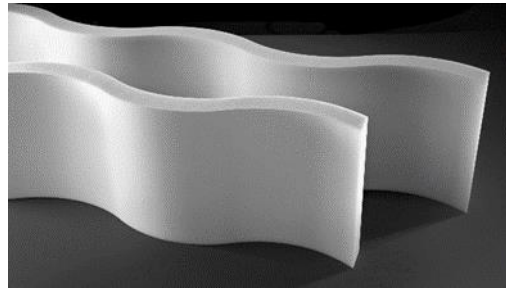

Standard thicknesses: 2", 3"

Standard sizes: 12" x 48", 18" x 48" (* 'custom' sizes available)

NRC: 2" – 1.50 (assuming 32 sq. ft. coverage area; w/ Type "J" mounting)

Sound Absorption Coefficient [Sabins / ft ²]										
Finish	Thickness [in]	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	SAA	NRC	Mounting Type
White	2.00	0.22	0.58	1.13	1.09	1.04	1.06	0.96	0.95	A

Total Absorption [Sabins / Baffle]										
Finish	Thickness [in]	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	Apparent SAA*	Apparent NRC*	Mounting Type
White	2.00	0.61	1.93	5.02	8.34	9.22	9.45	1.51	1.50	J

Quick Ship colors:

White	Sea Grey	Sand	Red	Pewter	Khaki	Deep Blue	Dk. Bronze	Bright Blue	Black

NOTE: Pantone Custom Coloring ('PCC') is available on ALL products (certain minimums are required)

Installation:

Cable or wire (see 'Acoustifoam CEILING BAFFLE Installation Instructions')